

REV.	ECN NO.	DESCRIPTION	DRAWN
2	ECR-630028	設變PLUG形狀改善上板後成品傾斜	陳高
3	CH10120048	ADD THE OPTION OF HF STATUS	IVANLUL_11/16'10

**SPECIFICATION:**

**1.MATERIAL:**

- 1)Housing: High Temp Termoplastic UL 94V-0
- 2)Contact : Copper Alloy

**2.Electrical Characteristics**

- 1)Current Rating: 1.5A/pin
- 2)Contact Resistance: 50m max
- 3)Dielectric Withstanding Voltage: 500VAC

**3.Environmental:**

Operating Temperature:-40°C to 105°C.

4.Harmful Material should be compliant to Doc."EI-0005"standards.

**5.PRODUCT NO. : SA 11 22 X-\*  $\Delta$**

SATA CONN: \_\_\_\_\_


PLUG: \_\_\_\_\_

PIN NO.: \_\_\_\_\_


NULL:WITH HALOGEN  
H:HALOGEN FREE

**PLATING:**


- 1: GOLD FLASH WITH LEAD FREE
- 3: 5u" GOLD WITH LEAD FREE
- 5: 15u" GOLD WITH LEAD FREE

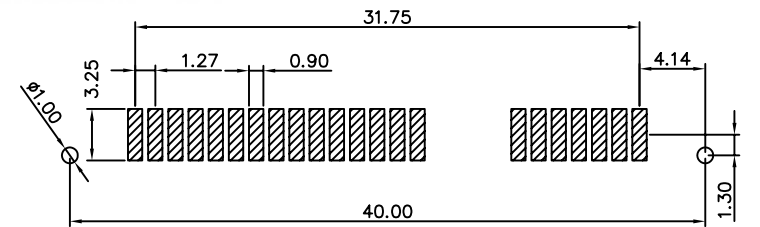

**RECOMMENDED PCB LAYOUT**

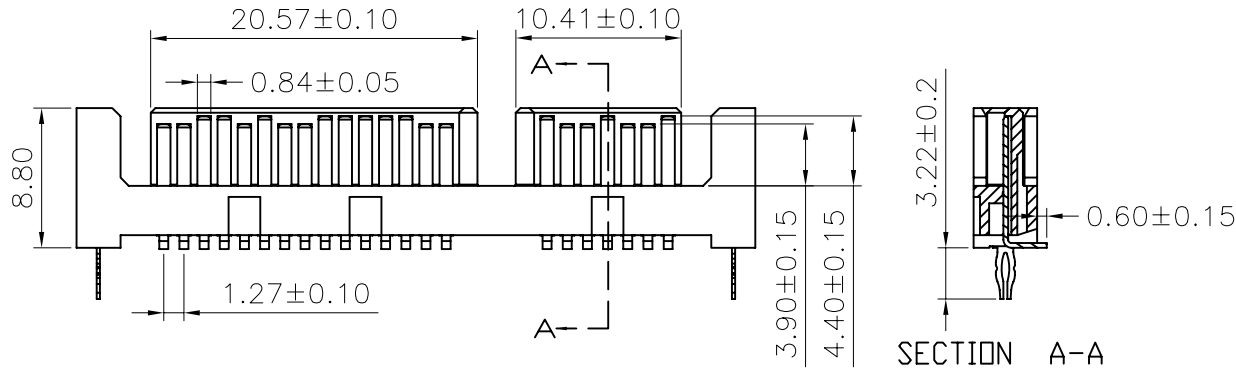

**SECTION A-A**

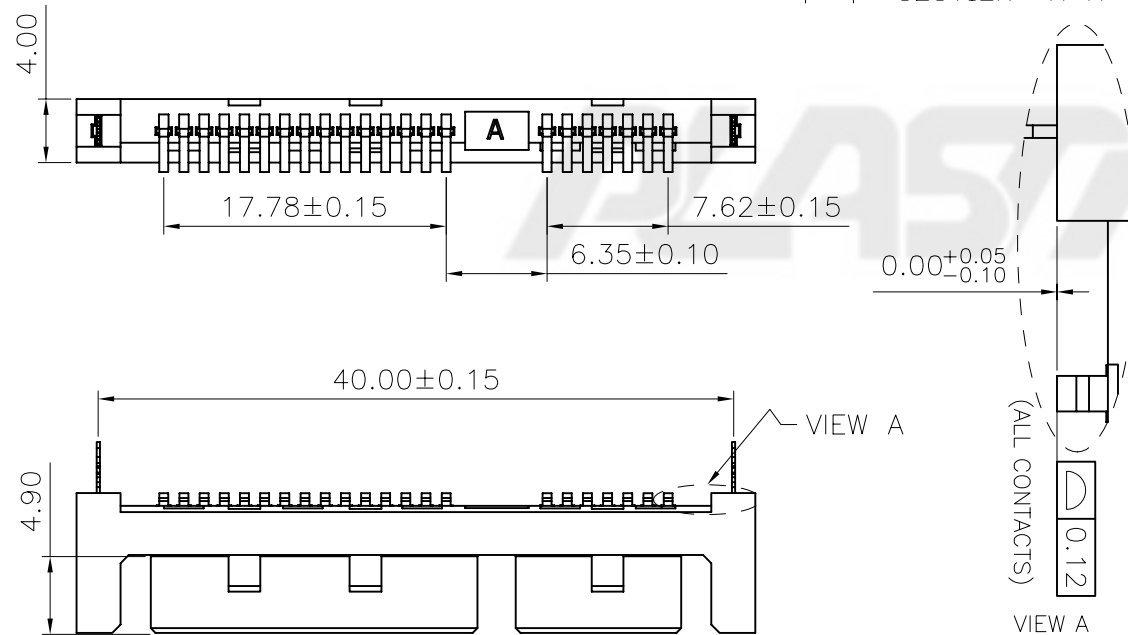

**VIEW A  
SCALE 4:1  
ROTATE 90°**



GENERAL TOLERANCE	
XX. ± 0.50	XXX. ±
X. ± 0.30	.XXX ±
.X ± 0.25	X.* ± 3'
.XX ± 0.20	.X* ± 2'

SCALE	1=1
UNIT	MM
SIZE	A4

ORIGINAL DRAWN	BAYM
CHECK	Lane Sun
APPROVE	Liss Xiang

DATE	02/16'06
DATE	11/16'10
DATE	11/16'10

DWG. NO.	600-0000-089
PARTS NO.(INTENDED USE)	SA1122X-* SERIES

TITLE	CUSTOMER DRAWING FOR SA1122X SERIES
-------	-------------------------------------

REV.	3
SHEET	1/1