


CIRCUITS	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
10	2.00	5.00	4.00	2.50		φ=4.00
12	2.50	5.50	4.50	3.00		φ=4.00
14	3.00	6.00	5.00	3.50		φ=4.00
16	3.50	6.50	5.50	4.00		φ=4.00
18	4.00	7.00	6.00	4.50		φ=4.00
20	4.50	7.50	6.50	5.00	6.00	4.00
22	5.00	8.00	7.00	5.50	6.00	4.00
24	5.50	8.50	7.50	6.00	6.00	4.00
26	6.00	9.00	8.00	6.50	6.00	4.00
28	6.50	9.50	8.50	7.00	6.00	4.00
30	7.00	10.00	9.00	7.50	6.00	4.00
32	7.50	10.50	9.50	8.00	6.00	4.00
34	8.00	11.00	10.00	8.50	6.00	4.00
36	8.50	11.50	10.50	9.00	6.00	4.00
38	9.00	12.00	11.00	9.50	6.00	4.00
40	9.50	12.50	11.50	10.00	6.00	4.00
42	10.00	13.00	12.00	10.50	6.00	4.00
44	10.50	13.50	12.50	11.00	6.00	4.00
46	11.00	14.00	13.00	11.50	6.00	4.00
48	11.50	14.50	13.50	12.00	6.00	4.00
50	12.00	15.00	14.00	12.50	6.00	4.00
52	12.50	15.50	14.50	13.00	6.00	4.00
54	13.00	16.00	15.00	13.50	6.00	4.00
56	13.50	16.50	15.50	14.00	6.00	4.00
60	14.50	17.50	16.50	15.00	6.00	4.00
62	15.00	18.00	17.00	15.50	6.00	4.00
64	15.50	18.50	17.50	16.00	6.00	4.00
66	16.00	19.00	18.00	16.50	6.00	4.00
68	16.50	19.50	18.50	17.00	6.00	4.00
70	17.00	20.00	19.00	17.50	6.00	4.00
72	17.50	20.50	19.50	18.00	6.00	4.00
74	18.00	21.00	20.00	18.50	6.00	4.00
76	18.50	21.50	20.50	19.00	6.00	4.00
78	19.00	22.00	21.00	19.50	6.00	4.00
80	19.50	22.50	21.50	20.00	6.00	4.00
82	20.00	23.00	22.00	20.50	10.00	4.00
84	20.50	23.50	22.50	21.00	10.00	4.00
86	21.00	24.00	23.00	21.50	10.00	4.00
88	21.50	24.50	23.50	22.00	10.00	4.00
90	22.00	25.00	24.00	22.50	10.00	4.00
92	22.50	25.50	24.50	23.00	10.00	4.00
94	23.00	26.00	25.00	23.50	10.00	4.00
96	23.50	26.50	25.50	24.00	10.00	4.00
98	24.00	27.00	26.00	24.50	10.00	4.00
100	24.50	27.50	26.50	25.00	10.00	4.00
110	27.00	30.00	29.00	27.50	10.00	4.00
120	29.50	32.50	31.50	30.00	10.00	4.00
140	34.50	37.50	36.50	35.00	10.00	4.00

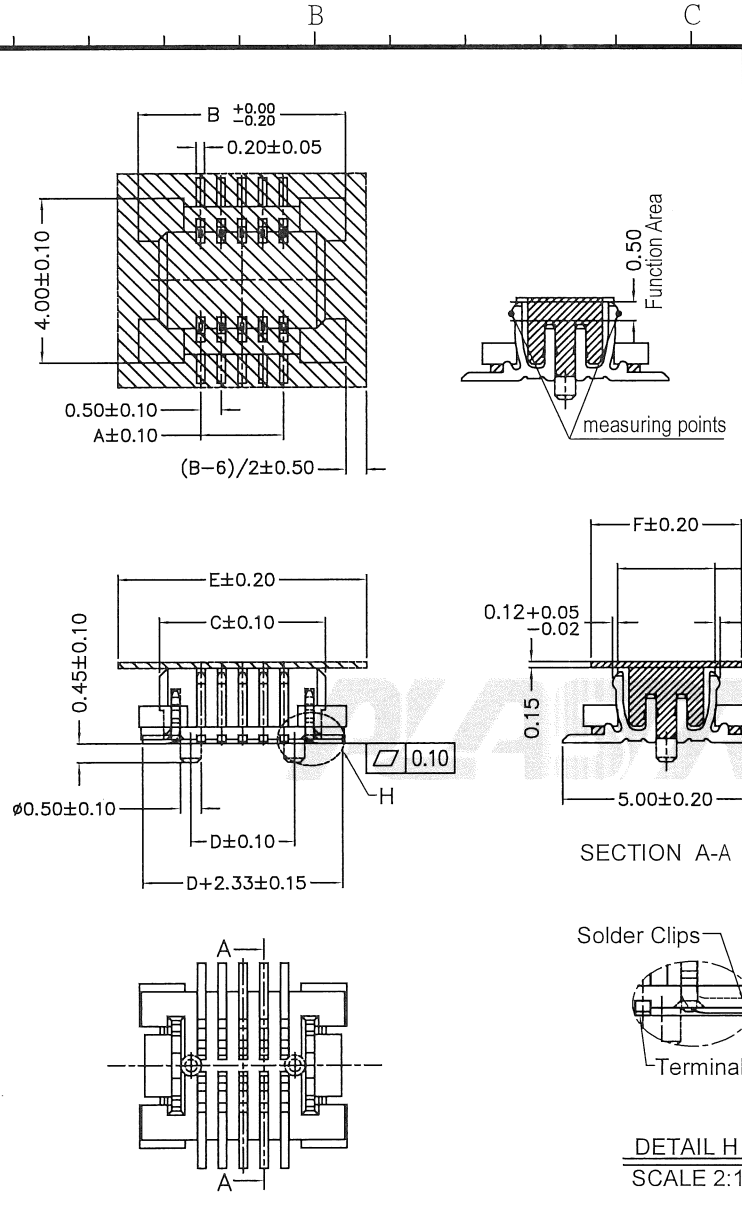

版次	ECN 编码	描述		设计/日期
25	EL22050161	改前	改后	林秋兰_2022/05/26
		/	更换新图框	
26	EL22120026	/	增加平面度管控标注	江蒙_2022/12/08
27	EL23030068	/	增加PCB Layout尺寸	江蒙_2023/03/20

NOTES: (Unless otherwise specified)

- Dimension shall be interpreted per ANSI Y14.5M.
- Materials:  
Insulator material: High Temperature Thermoplastic, UL 94V-0; Color: Black.  
Contact material: Copper Alloy
- Current Rating: 0.5 A Per Pin.
- Voltage Rating: 30V AC/DC.
- Working Temperature: -40°C ~ +105°C.
- Harmful material should be compliant to doc. "EI-0005" standards.
- Product number matrix:


ZVE-XXS1-X-X-X-\*

Definition	Code
◎ Tin plated	A
◎ Gold plated:	
flash B 15u" F	
10u" E 30u" J	
◎ Duplex plated:	
flash K 15u" P	
10u" N 30u" U	
◎ Standard: B	
All plating is lead free	

Number of Contacts: NULL:TUBE(W/O FILM), C:FILM+REEL, K:REEL(W/O FILM), F:FILM+TUBE

Contact Plating: NULL:Black, D: Natural

0:W/O Locating peg, 1:With Locating peg

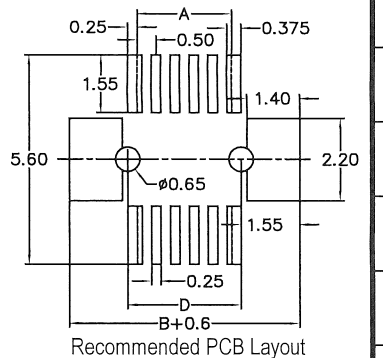

TOLERANCE TABLE		SCALE	5:1	DRAWN	江蒙	DATE	2023/03/20	DWG. NO.	600-0000-0202	TITLE	REV.
X. ± 0.30	X.° ± 3°	UNIT	mm	CHECK	江蒙	DATE	2023/03/20	PARTS NO.(INTENDED USE)	ZVE-XXS1-X-X-X-*	CUSTOMER DRAWING	27
.X ± 0.25	.X° ± 2°	SIZE	A4	APPROVE	江蒙	DATE	2023/03/20				SHEET