

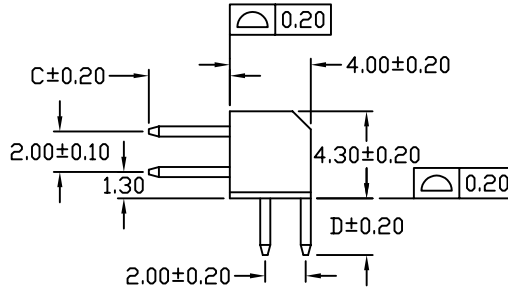
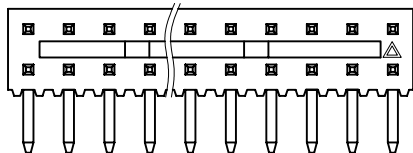
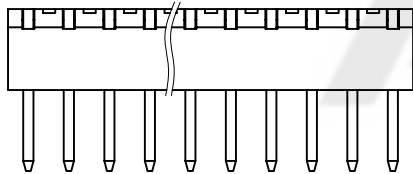
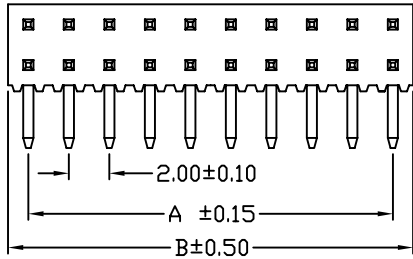
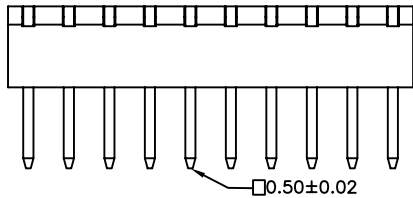


No. of Contacts	DIMENSIONS	
	A	B
4	2.00	4.00
6	4.00	6.00
8	6.00	8.00
10	8.00	10.00
12	10.00	12.00
14	12.00	14.00
16	14.00	16.00
18	16.00	18.00
20	18.00	20.00
22	20.00	22.00
24	22.00	24.00
26	24.00	26.00
28	26.00	28.00
30	28.00	30.00
32	30.00	32.00
34	32.00	34.00
36	34.00	36.00
38	36.00	38.00
40	38.00	40.00
42	40.00	42.00
44	42.00	44.00
46	44.00	46.00
48	46.00	48.00
50	48.00	50.00
52	50.00	52.00
54	52.00	54.00
56	54.00	56.00
58	56.00	58.00
60	58.00	60.00
62	60.00	62.00
64	62.00	64.00
66	64.00	66.00
68	66.00	68.00
70	68.00	70.00
72	70.00	72.00
74	72.00	74.00
76	74.00	76.00
78	76.00	78.00
80	78.00	80.00

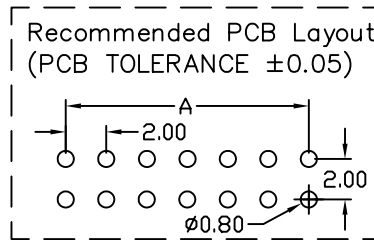

LESS THAN 40PIN

MORE THAN 40PIN(INCLUDED)



Rev.	ECN Number	Description	Drawn
9	EH09060071	增加40P以上塑膠逃料槽內加筋明細	Tina Luo_06/13'09
10	CH13070154	更新圖面	羅繼明_03/13'12

- NOTES: (UNLESS OTHERWISE SPECIFIED)
- DIMENSION SHALL BE INTERPRETED PER ANSI Y14.5M-1994
 - CONTACT RETENTION FORCE: 300g MIN. PER CONTACT.
 - DURABILITY: 50 CYCLES MIN..
 - CONTACT RESISTANCE: 20 m ohms MAX. INITIAL.
 - CURRENT RATING: 3 AMPS. Δ
 - RATING VOLTAGE: 30V AC/DC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC rms./MINUTE.
 - INSULATION RESISTANCE: 5000 Megohms MIN..
 - OPERATING TEMPERATURE: $-40^{\circ}\sim+105^{\circ}\text{C}$.
 - HARMFUL MATERIAL SHOULD BE COMPLIANT TO DOC. "EI-0005" STANDARDS.
 - MATERIAL:
HOUSING: LCP,UL 94V-0,COLOR BLACK. Δ
CONTACT: COPPER ALLOY.
 - HIGH TEMPERATURE POINT: $270\pm 5^{\circ}\text{C}$; 7s +2s/-0s Δ
 - PART NUMBER MATRIX:

Δ LTT-XXR-X-C/D

Brass

Number of Contacts
Right Angle

Contact Plating			
Definition	Code		
\odot Tin plated:	A		
\odot Gold plated:			
flash	B	15 μ "	F
10 μ "	E	30 μ "	J
\odot Standard:	B		
All plating is lead free.			

	number of rib
44pin	4
66pin	1
40~48 pin	3
50~58 pin	4
60~68 pin	5
70~80 pin	6



PLASTREN TECHNOLOGY (SHEN ZHEN) CO., LTD.

GENERAL TOLERANCE		SCALE	ORIGINAL DRAWN	DATE	DWG. NO.	TITLE	REV.
XX. \pm	XXX. \pm	1:1	林秋蘭	06/24'04	600-0000-0470	CUSTOMER DRAWING	10
X. \pm 0.30	.XXX \pm	UNIT	Lane Sun	03/13'12			
.X \pm 0.25	X.* \pm 3°	MM	CHECK	03/13'12	PARTS NO.(INTENDED USE)	SHEET	1/1
.XX \pm 0.20	.X* \pm 2°	SIZE	APPROVE	03/13'12			