
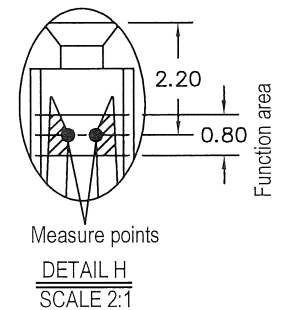





A B C D E

版次	ECN 编码	描述	设计/日期
7	CH14070090	改前	张浩_2014/05/20
		改后	
8	EL23020074	新增规格	江蒙_2023/02/27
		更换新图框	

PHFY-40R-X-C-X-X	99.06	102.10
PHFY-39R-X-C-X-X	96.52	99.56
PHFY-38R-X-C-X-X	93.98	97.02
PHFY-37R-X-C-X-X	91.44	94.48
PHFY-36R-X-C-X-X	88.90	91.94
PHFY-35R-X-C-X-X	86.36	89.40
PHFY-34R-X-C-X-X	83.82	86.86
PHFY-33R-X-C-X-X	81.28	84.32
PHFY-32R-X-C-X-X	78.74	81.78
PHFY-31R-X-C-X-X	76.20	79.24
PHFY-30R-X-C-X-X	73.66	76.70
PHFY-29R-X-C-X-X	71.12	74.16
PHFY-28R-X-C-X-X	68.58	71.62
PHFY-27R-X-C-X-X	66.04	69.08
PHFY-26R-X-C-X-X	63.50	66.54
PHFY-25R-X-C-X-X	60.96	64.00
PHFY-24R-X-C-X-X	58.42	61.46
PHFY-23R-X-C-X-X	55.88	58.92
PHFY-22R-X-C-X-X	53.34	56.38
PHFY-21R-X-C-X-X	50.80	53.84
PHFY-20R-X-C-X-X	48.26	51.30
PHFY-19R-X-C-X-X	45.72	48.76
PHFY-18R-X-C-X-X	43.18	46.22
PHFY-17R-X-C-X-X	40.64	43.68
PHFY-16R-X-C-X-X	38.10	41.14
PHFY-15R-X-C-X-X	35.56	38.60
PHFY-14R-X-C-X-X	33.02	36.06
PHFY-13R-X-C-X-X	30.48	33.52
PHFY-12R-X-C-X-X	27.94	30.98
PHFY-11R-X-C-X-X	25.40	28.44
PHFY-10R-X-C-X-X	22.86	25.90
PHFY-09R-X-C-X-X	20.32	23.36
PHFY-08R-X-C-X-X	17.78	20.82
PHFY-07R-X-C-X-X	15.24	18.28
PHFY-06R-X-C-X-X	12.70	15.74
PHFY-05R-X-C-X-X	10.16	13.20
PHFY-04R-X-C-X-X	7.62	10.66
PHFY-03R-X-C-X-X	5.08	8.12

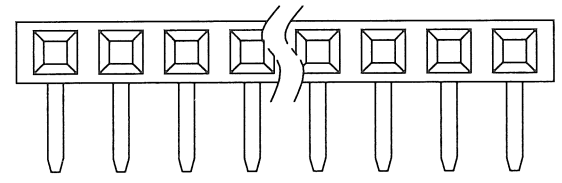

- NOTES: (Unless otherwise specified)
- Dimension shall be interpreted per ANSI Y14.5M.
  - Materials:  
Insulator material: High Temperature Thermoplastic, UL 94V-0; Color: Black.  
Contact material: Phosphor Bronze.
  - Current Rating: 3 A.
  - Voltage Rating: 30V AC/DC.
  - Working Temperature: -40°C ~ +105°C.
  - Harmful material should be compliant to doc. "EI-0005" standards.
  - Product number matrix:  
PHFY-XXR-X-C-X-X

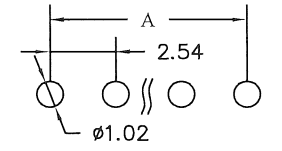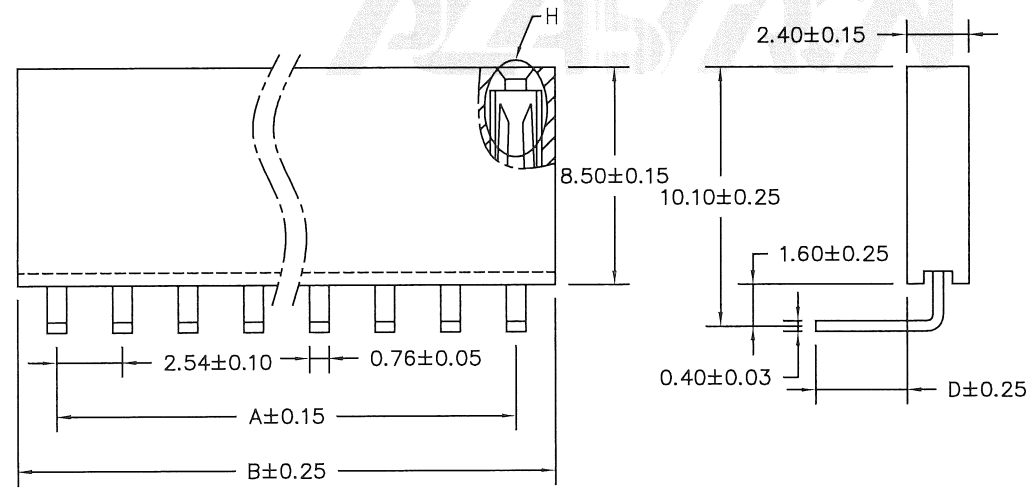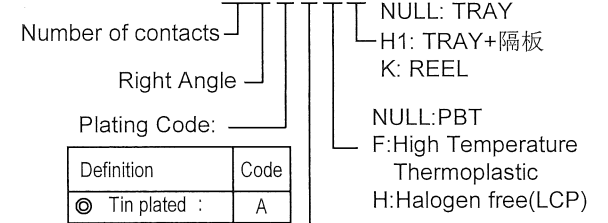


RECOMMENDED PCB LAYOUT

	TOLERANCE TABLE		SCALE 2.5:1	DRAWN 江蒙	DATE 2023/02/27	DWG. NO. 600-0000-0092	TITLE	REV. 8
	X ± 0.30	X° ± 3°	UNIT mm	CHECK 李露涛	DATE 2023/03/04	PARTS NO.(INTENDED USE) PHFY-XXR-X-C-X-X	CUSTOMER DRAWING	SHEET 1/3
	.X ± 0.25	.X° ± 2°	SIZE A4	APPROVE 李露涛	DATE 2023/03/04			
	.XX ± 0.20							


A B C D E

A B C D E

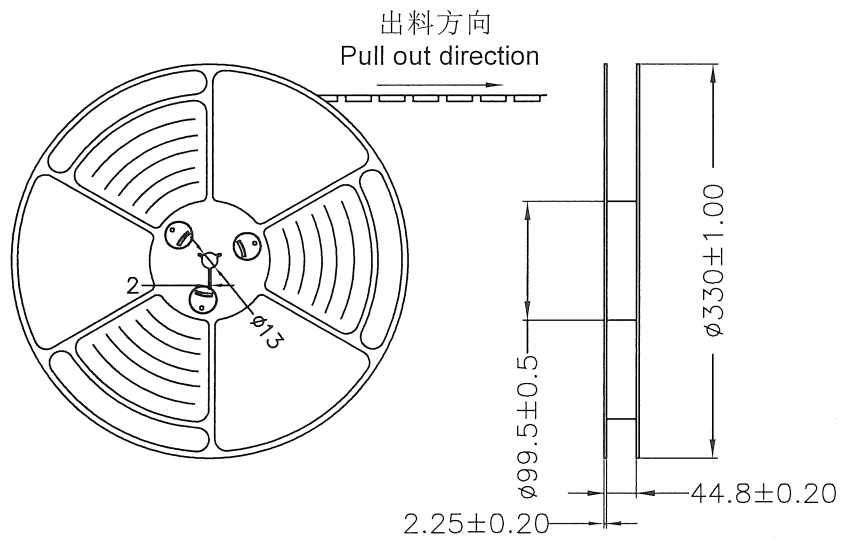

备注 (NOTES):

- 1. 带子引导长度  
Lead tape length
- 转绕方向  
Pull out direction


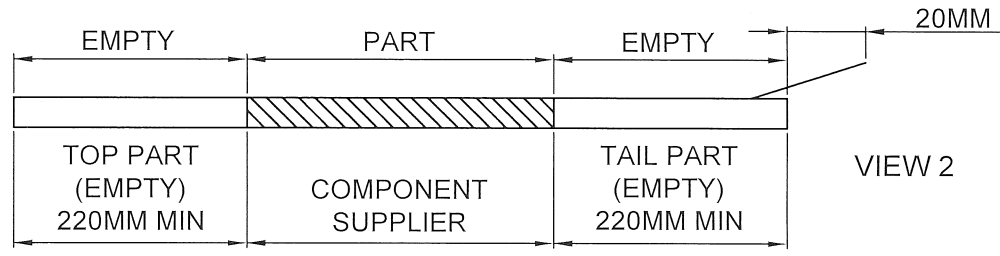


出料方向  
Pull out direction

VIEW 1

- 2. 上带剥拉力为: 0.2~1.3N(20gf~130gf)  
Peeling off force of top tape :0.2~1.3N(20gf~130gf)

出货运输过程中一定注意: 卷带在运输过程中不能散开  
This requirement should be applied at shipment:  
The reel tape can not be separated during transportation.

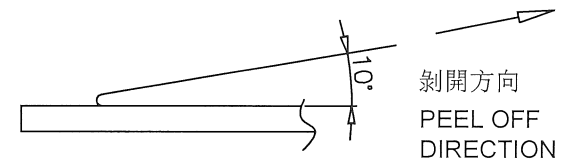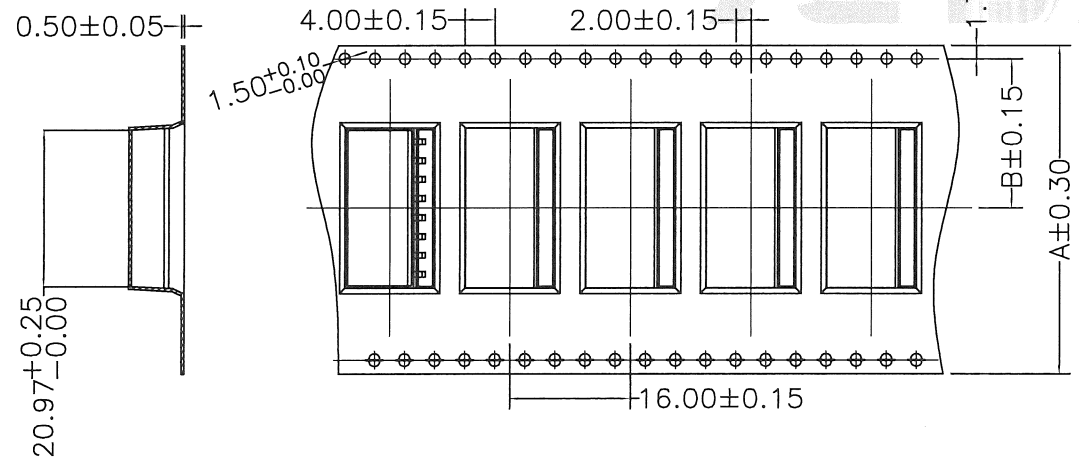


VIEW 3




TOLERANCE TABLE	SCALE	1:1	DRAWN	江蒙	DATE	2023/02/27	DWG. NO.	TITLE	REV.
	X. ± 0.30	X.° ± 3°	UNIT	mm	CHECK	李曼冲			DATE
	.X ± 0.25	.X° ± 2°	SIZE	A4	APPROVE	李曼冲	DATE	2023/03/04	SHEET
	.XX ± 0.20								2/3
							600-0000-0092	CUSTOMER DRAWING	
							PARTS NO.(INTENDED USE)		
							PHFY-XXR-X-C-X-X		

A B C D E

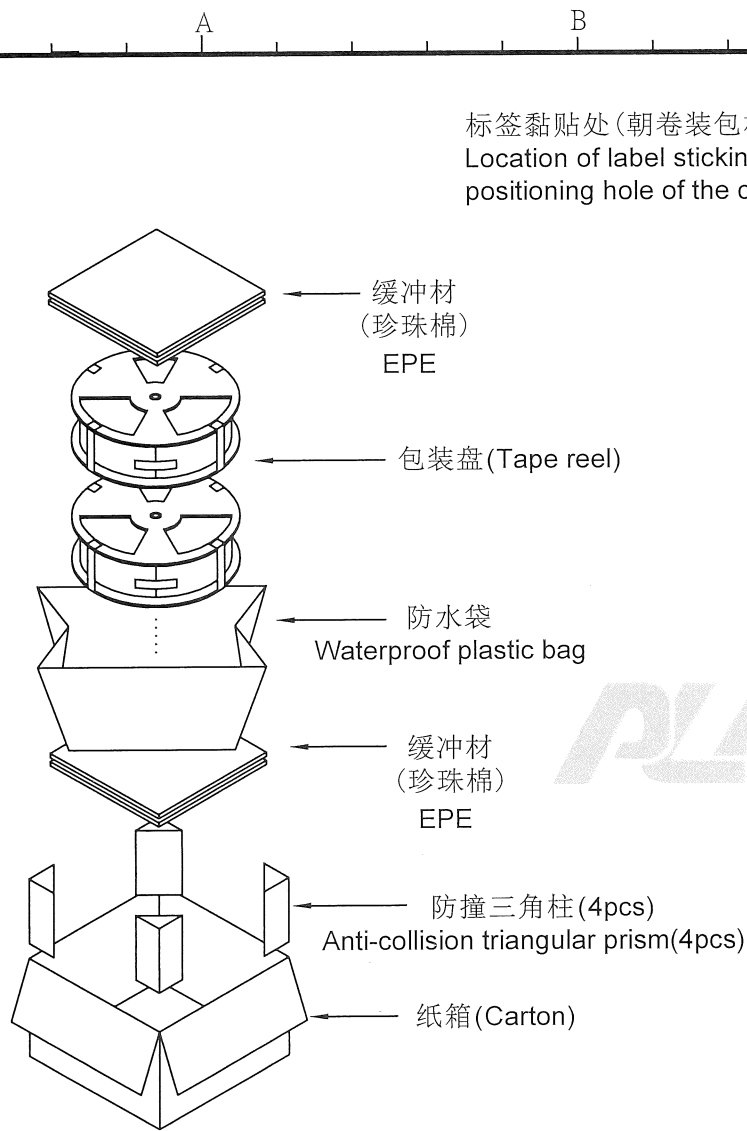

VIEW 4

标签黏贴处 (朝卷装包材的小定位孔一侧)  
Location of label sticking (label at small positioning hole of the carrier tape side)

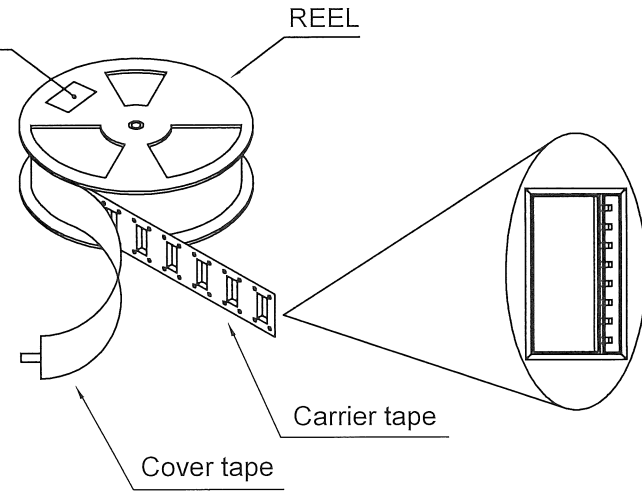

VIEW 5

备注 (NOTES):

1. 每卷包装数量及每箱装箱数量如下表格。  
Packing Q'ty of each reel & carton as below table shown.
2. 上胶带覆盖下包装带用自粘包装。  
Use cover tape to cover and seal up.
3. 每个纸箱放2个珍珠棉。  
Every carton use 2pcs EPE.
4. 将装满产品的卷盘放入纸箱并以胶带封口。  
Put reels in the carton and use adhesive tape to seal up.

产品料号 (Product No.)	包装数量 (Packing Quantity)					
	A	B	C	PCS/REEL	REELS/CARTON	PCS/CARTON
PHFY-08R-B-013-H-K	44	20	7.02	600	4	2400
PHFY-08R-B-034-H-K	44	20	7.02	600	4	2400



TOLERANCE TABLE

X. ± 0.30	X.° ± 3°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	

SCALE 1:1

UNIT mm

SIZE A4



DRAWN

CHECK

APPROVE

江蒙

李昌清

李昌清

DATE

DATE

DATE

2023/02/27

2023/03/04

2023/03/04

DWG. NO.

PARTS NO. (INTENDED USE)

600-0000-0092

PHFY-XXR-X-C-X-X

TITLE

CUSTOMER DRAWING

REV.

SHEET

8

3/3