



No. of Contacts	DIMENSIONS	
	A	C
6	5.08	8.12
8	7.62	10.66
10	10.16	13.20
12	12.70	15.74
14	15.24	18.28
16	17.78	20.82
18	20.32	23.36
20	22.86	25.90
22	25.40	28.44
24	27.94	30.98
26	30.48	33.52
28	33.02	36.06
30	35.56	38.60
32	38.10	41.14
34	40.64	43.68
36	43.18	46.22
38	45.72	48.76
40	48.26	51.30
42	50.80	53.84
44	53.34	56.38
46	55.88	58.92
48	58.42	61.46
50	60.96	64.00
52	63.50	66.54
54	66.04	69.08
56	68.58	71.62
58	71.12	74.16
60	73.66	76.70
62	76.20	79.24
64	78.74	81.78
66	81.28	84.32
68	83.82	86.86
70	86.36	89.40
72	88.90	91.94
74	91.44	94.48
76	93.98	97.02
78	96.52	99.56
80	99.06	102.10

Rev.	ECN Number	Description	Drawn
4	CH09070128	Change Current	Mike Zhang
5	CH13070127	根據客戶需求增加塑膠材質	張浩_07/09'13
6	EH16070089	Modify drawing in accordance with product.	Xiuqing Chen_2016/07/25

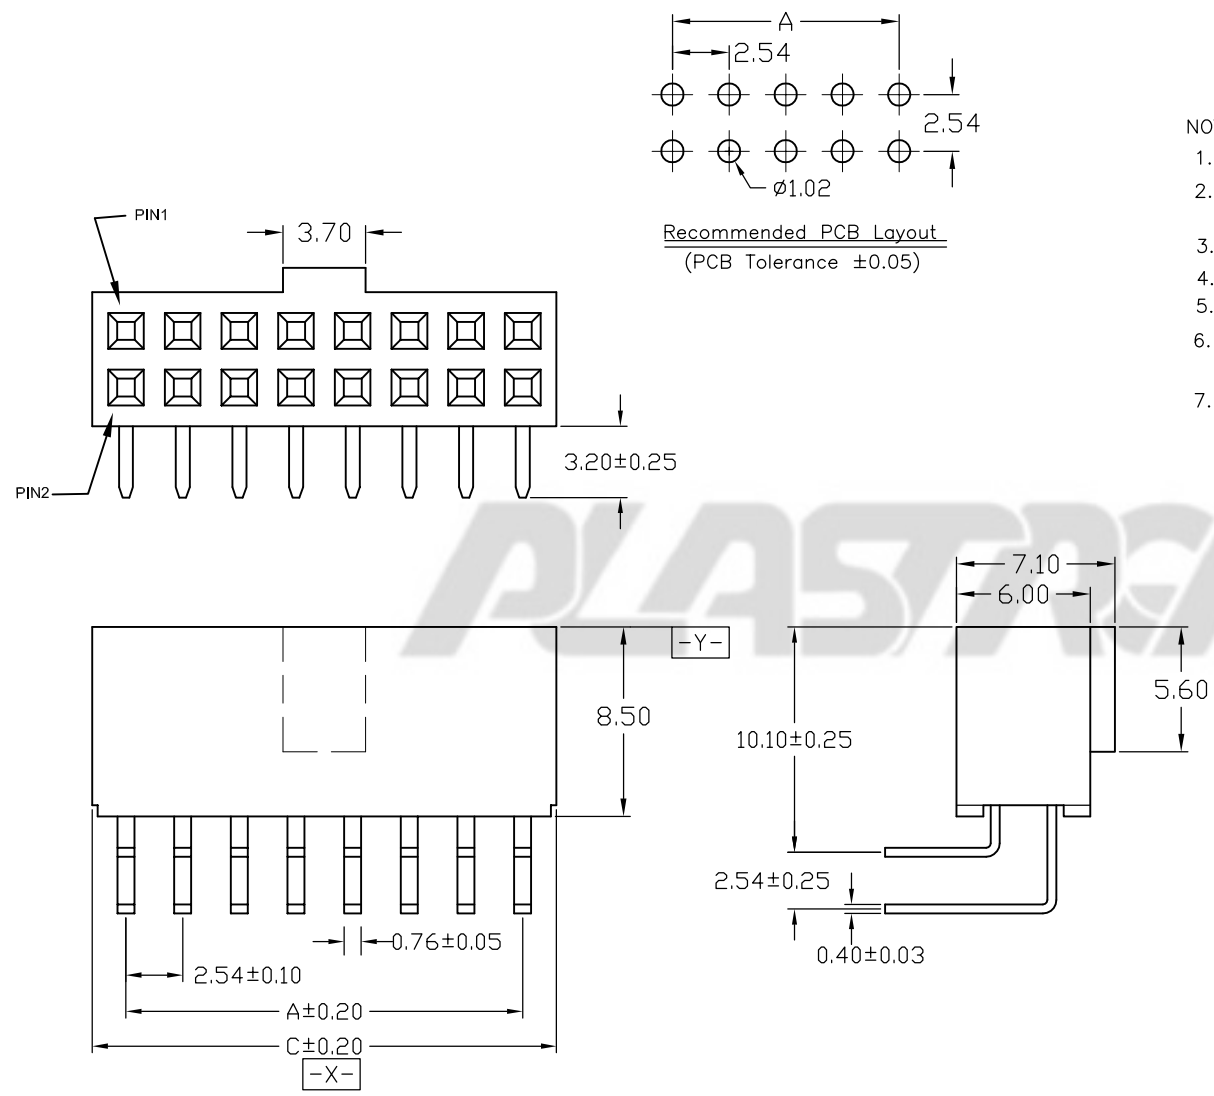

- NOTES: (Unless otherwise specified)
- Dimension shall be interpreted per ANSI Y14.5M-1994.
 - Materials: Insulator material: Thermoplastic, UL 94V-0
Contact material: Phosphor Bronze
 - Current rating: 3 Ampere.
 - Voltage rating: 30V AC/DC.
 - Operating temperature: -40°~+105°C.
 - Harmful material should be compliant to doc. "EI-0005" Standards.
 - Product number matrix:

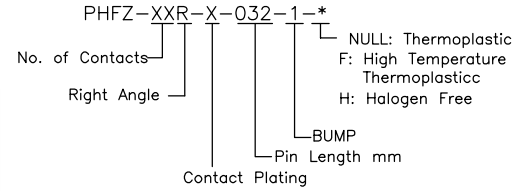

Definition	Code
◎ Tin plated	A
◎ Gold plated:	
flash B	5 μ" D 10 μ" E
15 μ" F	20 μ" G 30 μ" J
◎ Duplex plated	
flash K	5 μ" M 10 μ" N
15 μ" P	20 μ" Q 30 μ" U
◎ Standard: B	
◎ Prefix "V" means lead free plating	



GENERAL TOLERANCE	
XX. ± 0.50	XXX. ±
X. ± 0.40	.XXX ±
.X ± 0.25	X.° ± 4'
.XX ± 0.20	.X° ± 4'

SCALE	1=1
UNIT	MM
SIZE	A4

ORIGINAL DRAWN	Xiuqing Chen
CHECK	Gavin Gao
APPROVE	Ningjing Zhu

DATE	2016/07/25
DATE	2016/07/25
DATE	2016/07/25

DWG. NO.	600-0000-0288
PARTS NO.(INTENDED USE)	PHFZ-XXR-X-032-1-*

TITLE	CUSTOMER DRAWING 2.54P, R/A, SOCKET SERIES
-------	--

REV.	6
SHEET	1/1