


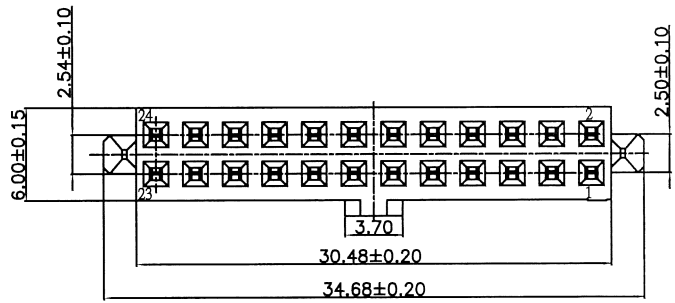



版次	ECN 编码	描述		设计/日期
1	EH15110276	初版发行		周雨博_2015/11/09
2	EH16060079	改前	改后	周雨博_2016/06/27
		更新图面		
3	EL22090089	更换新图框		江蒙_2022/09/23



- NOTES: (Unless otherwise specified)
- Dimension shall be interpreted per ANSI Y14.5M.
 - Materials:
Insulator material: LCP,UL 94V-0;Color:Black.
Contact material: Phosphor Bronze.
 - Current Rating: 3 A.
 - Voltage Rating: 30V AC/DC.
 - Working Temperature: -40°C ~ +105°C.
 - Harmful material should be compliant to doc. "EI-0005" standards.
 - Product number matrix:

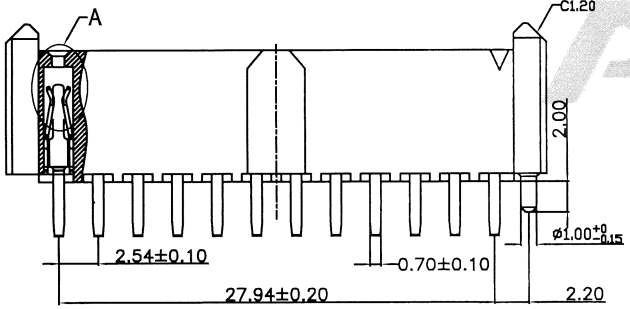

PWFZ-24S-U-S01-H
 Number of contacts: 24:24PIN
 LH : Halogen free
 1:With locating peg
 Plating Code:
 Function area:Plating Au 30u" Min.
 Termination: Plating matte Sn 100u" Min.
 The bottom layer:Plating Ni 50u" Min.

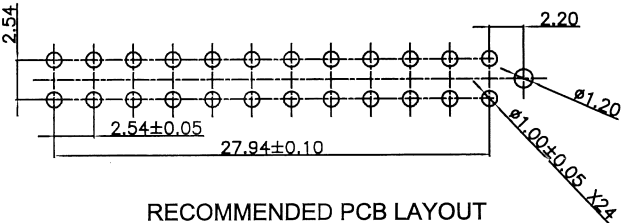

FOR HUAWEI USE ONLY

HUA WEI CODE	14200314
PLA P/N	PWFZ24SUS01H



TOLERANCE TABLE	
X. ± 0.30	X.° ± 3°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	

SCALE	1:1
UNIT	mm
SIZE	A4

DRAWN
CHECK
APPROVE


江蒙
李昌涛
江蒙

DATE 2022/09/23
DATE 2022/09/24
DATE 2022/09/24

DWG. NO. 600-0000-1558
PARTS NO.(INTENDED USE) PWFZ24SUS01H


TITLE CUSTOMER DRAWING

REV. 3
SHEET 1/3

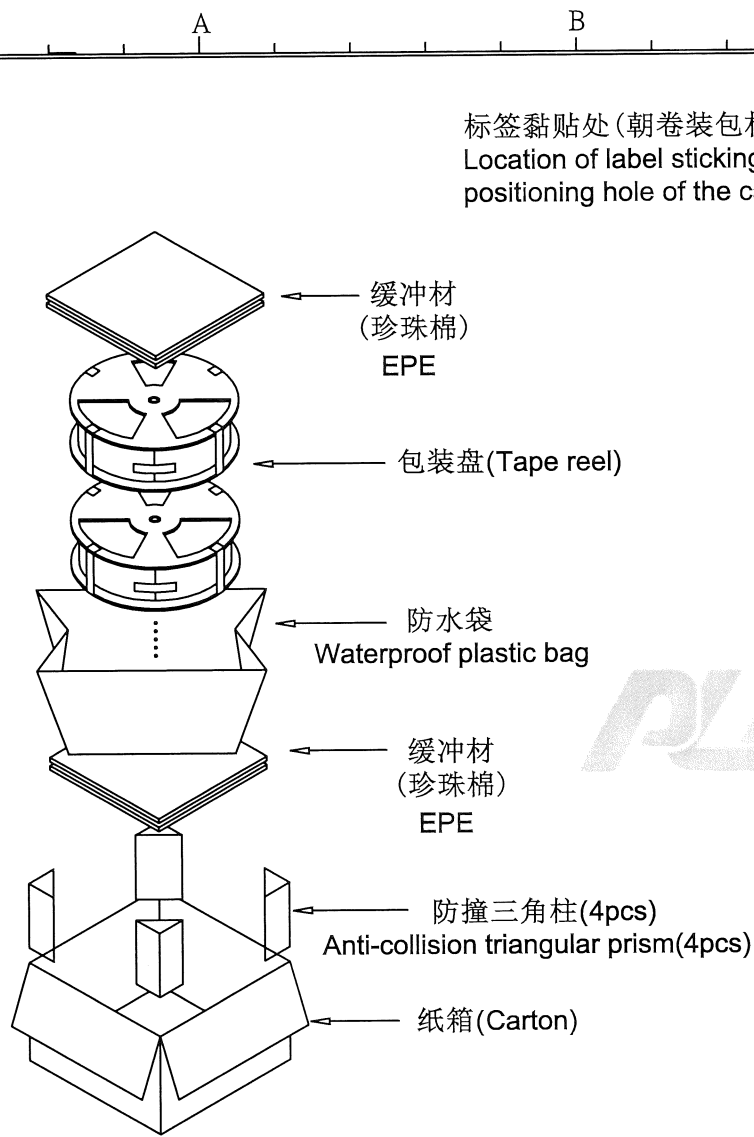

VIEW 4

标签黏贴处(朝卷装包材的小定位孔一侧)
Location of label sticking (label at small positioning hole of the carrier tape side)

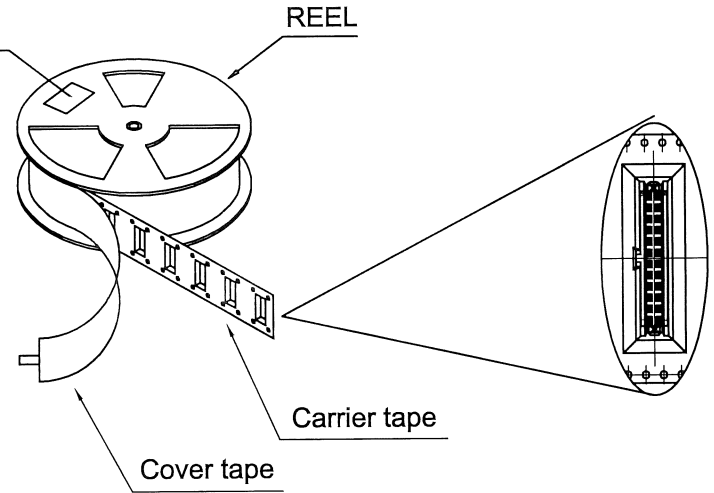

VIEW 5

备注 (NOTES):

- 每卷包装数量及每箱装箱数量如下表格。
Packing Q'ty of each reel & carton as below table shown.
- 上胶带覆盖下包装带用自粘包装。
Use cover tape to cover and seal up.
- 每个纸箱放2个珍珠棉。
Every carton use 2pcs EPE.
- 将装满产品的卷盘放入纸箱并以胶带封口。
Put reels in the carton and use adhesive tape to seal up.

产品料号 (Product No.)	包装数量(Packing Quantity)		
	PCS/REEL	REELS/CARTON	PCS/CARTON
PWFZ24SUS01H	200	3	600

	TOLERANCE TABLE		SCALE 1:1	DRAWN 江蒙	DATE 2022/09/23	DWG. NO. 600-0000-1558	TITLE	REV. 3
	X ± 0.30	X° ± 3°	UNIT mm	CHECK 李国涛	DATE 20220912	PARTS NO.(INTENDED USE) PWFZ24SUS01H	CUSTOMER DRAWING	SHEET 3/3
	.X ± 0.25	.X° ± 2°	SIZE A4	APPROVE 李国涛	DATE 20220914			
	.XX ± 0.20							