

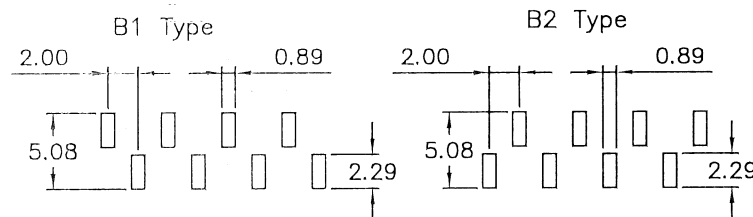
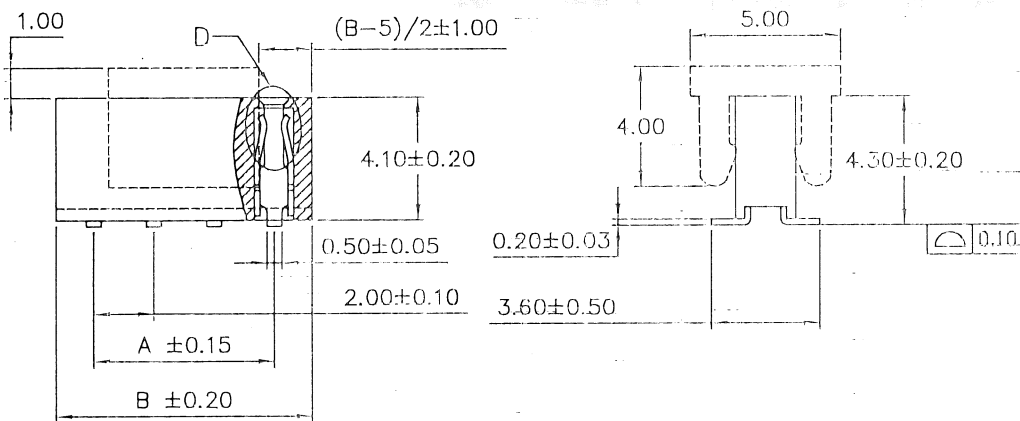



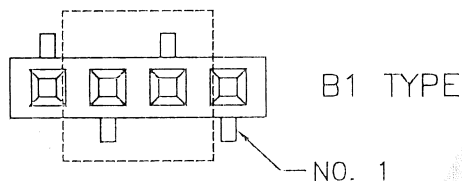


RoHS 2015

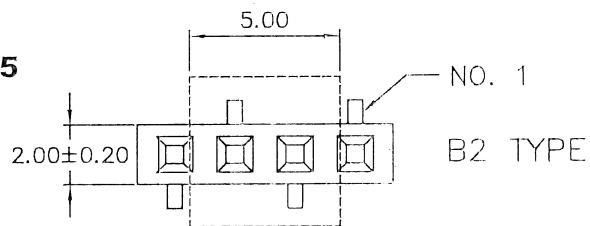

版次	ECN 编码	描述		设计/日期
		改前	改后	
5	EW07010017	/	换用新格式	邱若婷_2015/03/05
6	EL22030013	/	更换新图框	江蒙_2022/03/03

NOTES: (UNLESS OTHERWISE SPECIFIED)

- CURRENT RATING: 2 AMPERE.
- CONTACT RESISTANCE: 20 m ohms MAX. FOR INITIAL.
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC rms. PER ONE MINUTE.
- INSULATION RESISTANCE: 1000 M ohms MIN..
- HARMFUL MATERIAL SHOULD BE COMPLIANT TO DOC. "EI-0005" STANDARDS.
- PRODUCT NUMBER MATRIX:

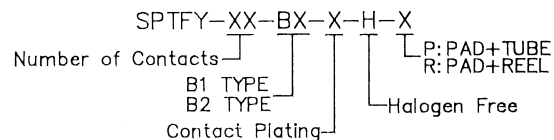

Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash	B 15μ" F
10μ"	E 30μ" J
◎Standard: B	
Prefix "V" means lead free plating	

25	48.00	50.50
24	46.00	48.50
23	44.00	46.50
22	42.00	44.50
21	40.00	42.50
20	38.00	40.50
19	36.00	38.50
18	34.00	36.50
17	32.00	34.50
16	30.00	32.50
15	28.00	30.50
14	26.00	28.50
13	24.00	26.50
12	22.00	24.50
11	20.00	22.50
10	18.00	20.50
09	16.00	18.50
08	14.00	16.50
07	12.00	14.50
06	10.00	12.50
05	8.00	10.50
04	6.00	8.50
03	4.00	6.50
No. of Contacts	A	B
DIMENSIONS		



TOLERANCE TABLE		SCALE	DRAWN	DATE	DWG. NO.	TITLE	REV.
X. ± 0.30	X.° ± 3°	8:1	江蒙	2022/03/03	600-0000-0231	CUSTOMER DRAWING	6
.X ± 0.25	.X° ± 2°	UNIT mm	CHECK 李晨涛	DATE 2022/03/03	PARTS NO.(INTENDED USE)		SHEET
.XX ± 0.20		SIZE A4	APPROVE 江蒙	DATE 2022/03/03	SPTFY-XX-BX-X-H-X		1/1