


A B C D E

版次	ECN 编码	描述		设计/日期
8	EH20100011	改前	改后	苏琴_2020/10/12
		未标示	标示1.89	


PTFZ-80S2*	78.00	80.50
PTFZ-78S2*	76.00	78.50
PTFZ-76S2*	74.00	76.50
PTFZ-74S2*	72.00	74.50
PTFZ-72S2*	70.00	72.50
PTFZ-70S2*	68.00	70.50
PTFZ-68S2*	66.00	68.50
PTFZ-66S2*	64.00	66.50
PTFZ-64S2*	62.00	64.50
PTFZ-62S2*	60.00	62.50
PTFZ-60S2*	58.00	60.50
PTFZ-58S2*	56.00	58.50
PTFZ-56S2*	54.00	56.50
PTFZ-54S2*	52.00	54.50
PTFZ-52S2*	50.00	52.50
PTFZ-50S2*	48.00	50.50
PTFZ-48S2*	46.00	48.50
PTFZ-46S2*	44.00	46.50
PTFZ-44S2*	42.00	44.50
PTFZ-42S2*	40.00	42.50
PTFZ-40S2*	38.00	40.50
PTFZ-38S2*	36.00	38.50
PTFZ-36S2*	34.00	36.50
PTFZ-34S2*	32.00	34.50
PTFZ-32S2*	30.00	32.50
PTFZ-30S2*	28.00	30.50
PTFZ-28S2*	26.00	28.50
PTFZ-26S2*	24.00	26.50
PTFZ-24S2*	22.00	24.50
PTFZ-22S2*	20.00	22.50
PTFZ-20S2*	18.00	20.50
PTFZ-18S2*	16.00	18.50
PTFZ-16S2*	14.00	16.50
PTFZ-14S2*	12.00	14.50
PTFZ-12S2*	10.00	12.50
PTFZ-10S2*	8.00	10.50
PTFZ-08S2*	6.00	8.50
PTFZ-06S2*	4.00	6.50
PTFZ-04S2*	2.00	4.50
P/N	A	B

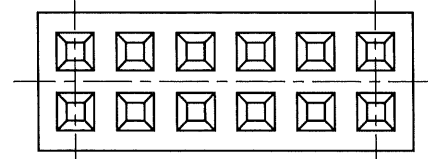

PARTS NO.	C
PTFZ-XXS2-X-012	1.20
PTFZ-XXS2-X-024	2.40
PTFZ-XXS2-X-032	3.20


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. INSERTION FORCE: 200gf MAX. PER CONTACT.
2. WITHDRAW FORCE: 20gf MIN. PER CONTACT.
3. DURABILITY: 50 CYCLES MIN..
4. CONTACT RETENTION FORCE: 250gf MIN. PER CONTACT.
5. CURRENT RATING: 1 AMPERE.
6. CONTACT RESISTANCE: 20 m ohms MAX. FOR INITIAL.
7. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC rms. PER ONE MINUTE.
8. INSULATION RESISTANCE: 1000 M ohms MIN..
9. HARMFUL MATERIAL SHOULD BE COMPLIANT TO DOC. "EI-0005" STANDARDS.
10. DIMENSION SHALL BE INTERPRETED PER ANSI Y14.5M-1994
11. PRODUCT NUMBER MATRIX:

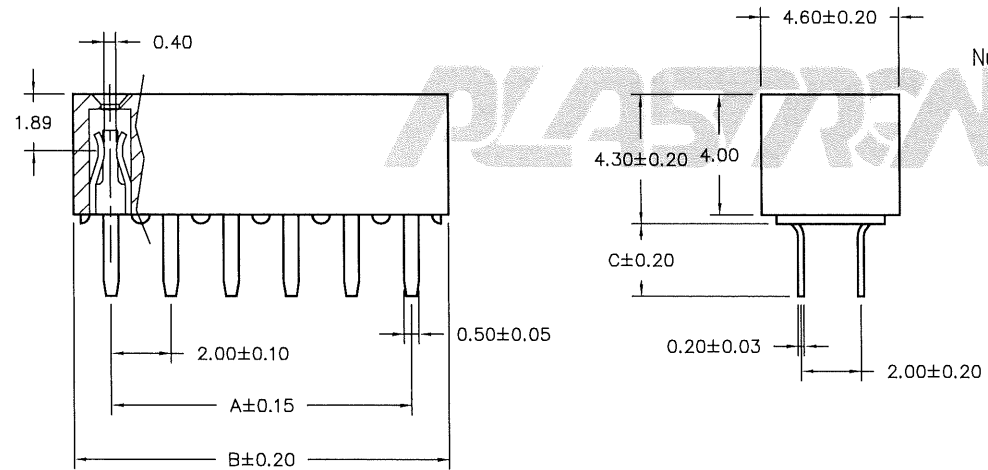

PTFZ - XX S2 - X - C
 Number of Contacts | Contact Plating
 Straight

Definition	Code
◎ Tin plated	A
◎ Gold plated :	
flash B 5u" D 10u" E	
15u" F 20u" G 30u" J	
◎ Duplex plated	
flash K 5u" M 10u" N	
15u" P 20u" Q 30u" U	
◎ Standard: B	
◎ Prefix "V" means lead free plating	

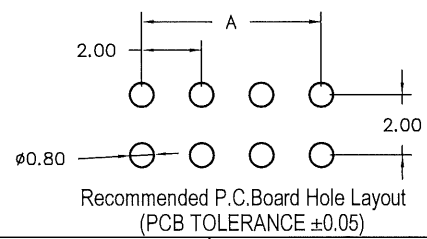

TOLERANCE TABLE	SCALE	4:1	DRAWN	苏琴	DATE	2020/10/12	DWG. NO.	600-0000-0121	TITLE	CUSTOMER DRAWING	REV.	8
	X. ± 0.30	X.° ± 3°		UNIT	mm	CHECK		朱祥		DATE	2020/10/13	SHEET
	.X ± 0.25	.X° ± 2°	SIZE	A4	APPROVE	朱祥	DATE	2020/10/13	PARTS NO.(INTENDED USE)	PTFZ-XXS2-X-C		
	.XX ± 0.20											

A B C D E