


REV.	ECN NO.	DESCRIPTION	DRAWN	APPD.
5	EC2-590038	修正規格說明	詹益東	林錫錦
6	CW09040015	變更版本發行	唐亮	Everard


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

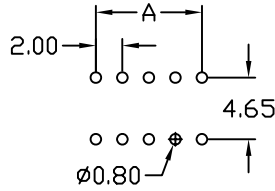

NOTES: (UNLESS OTHERWISE SPECIFIED)

- CURRENT RATING: 1 AMPERE.
- CONTACT RESISTANCE: 20 m ohms MAX. FOR INITIAL.
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC rms. PER ONE MINUTE.
- INSULATION RESISTANCE: 5000 M ohms MIN..
- HARMFUL MATERIAL SHOULD BE COMPLIANT TO DOC. "EI-0005" STANDARDS.
- PRODUCT NUMBER MATRIX:

No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
4	2.00	4.20	
6	4.00	6.20	○
8	6.00	8.20	○
10	8.00	10.20	○
12	10.00	12.20	○
14	12.00	14.20	○
16	14.00	16.20	○
18	16.00	18.20	○
20	18.00	20.20	○
22	20.00	22.20	○
24	22.00	24.20	○
26	24.00	26.20	○
28	26.00	28.20	○
30	28.00	30.20	○
32	30.00	32.20	○
34	32.00	34.20	○
36	34.00	36.20	○
38	36.00	38.20	○
40	38.00	40.20	○
42	40.00	42.20	○
44	42.00	44.20	○
46	44.00	46.20	○
48	46.00	48.20	○
50	48.00	50.20	○

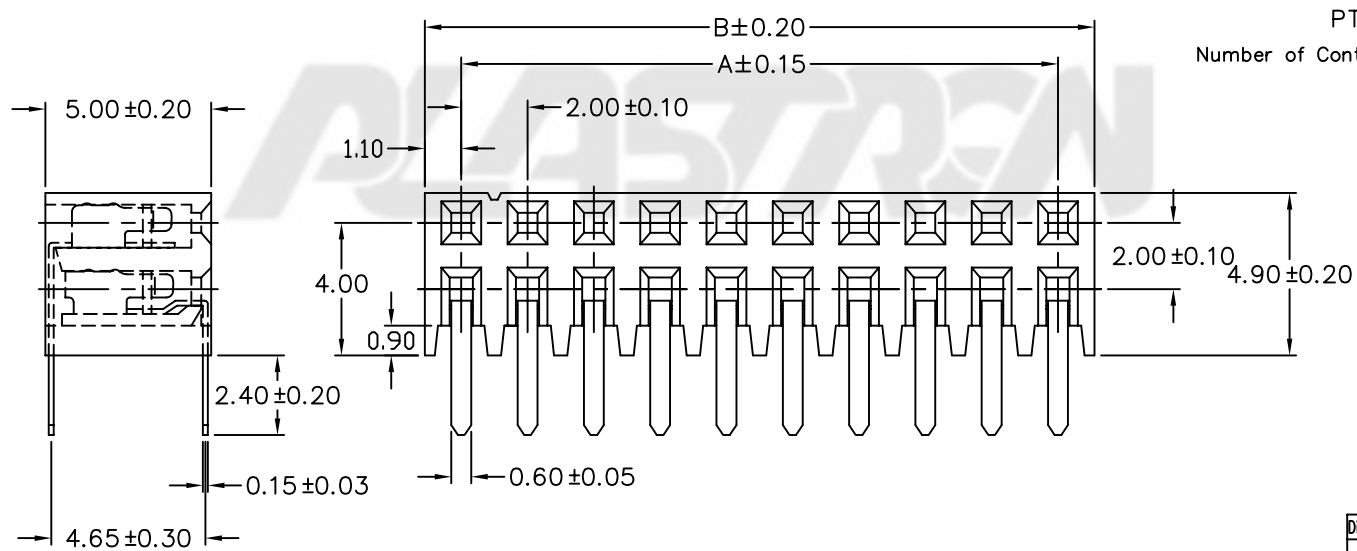

PTCZ-XX-X-024
Number of Contacts: XX
Contact Plating: X

Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
◎Standard: B	
All plating is lead free	

Diagram	Molding description
○	mass production & assemble mold
◎	sample & assemble mold
⊕	mass production & fix mold
⊕	sample & fix mold

CONTACT	COPPER ALLOY	
HOUSING	THERMOPLASTIC, UL RATED 94V-0.	BLACK
PART	MATERIAL	REMARKS

	GENERAL TOLERANCE		SCALE 1=1	ORIGINAL DRAWN 江坤容	DATE 02'/11/04	DWG. NO. 600-0000-0624	TITLE 2.0X2.0mm SOCKET SIDE ENTRY (成品規格圖)	REV. 6
	XX. ± 0.50	XXX. ±	UNIT MM	CHECK 唐亮	DATE 09'/04/03			PARTS NO.(INTENDED USE) PTCZ-XX-X-024
	X. ± 0.30	.XXX ± 0.10	SIZE A4	APPROVE Everard qi	DATE 09'/04/03			
	.X ± 0.25	X.* ± 4'						
.XX ± 0.20	.X.* ± 4'							