
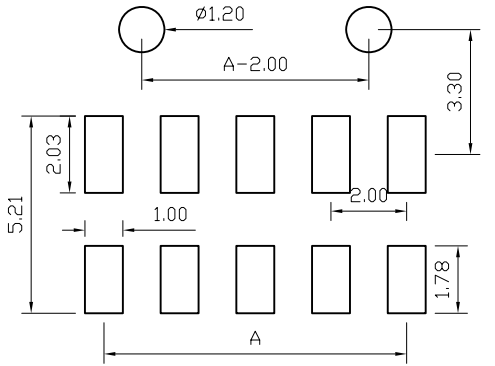
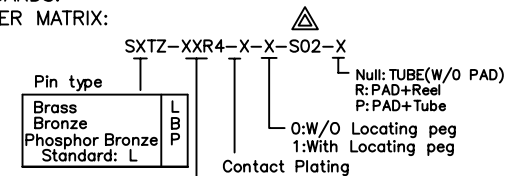
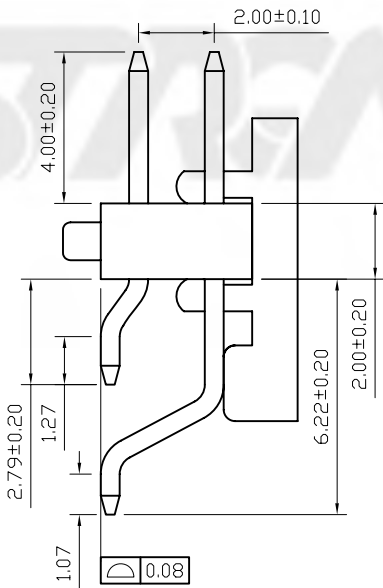
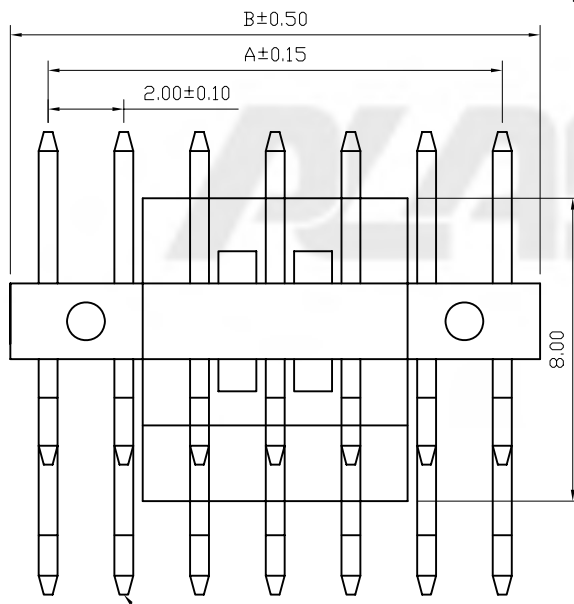


No. of Contacts	DIMENSIONS		REMARK (備註)	
	A	B	有導柱	無導柱
6	4.00	6.00	○	○
8	6.00	8.00	○	○
10	8.00	10.00	○	○
12	10.00	12.00	○	○
14	12.00	14.00	○	○
16	14.00	16.00	○	○
18	16.00	18.00	○	○
20	18.00	20.00	⊕	⊕
22	20.00	22.00	○	○
24	22.00	24.00	⊕	⊕
26	24.00	26.00	⊕	⊕
28	26.00	28.00	○	○
30	28.00	30.00	⊕	⊕
32	30.00	32.00	○	○
34	32.00	34.00	○	○
36	34.00	36.00	○	○
38	36.00	38.00	○	○
40	38.00	40.00	○	○
42	40.00	42.00	○	○
44	42.00	44.00	○	○
46	44.00	46.00	○	○
48	46.00	48.00	○	○
50	48.00	50.00	○	○

No. of Contacts/2 For Odd pin $(B-7.0)/2 \pm 1.00$
 No. of Contacts/2 For Even pin $(B-7.0)/2 - 1.0 \pm 1.00$

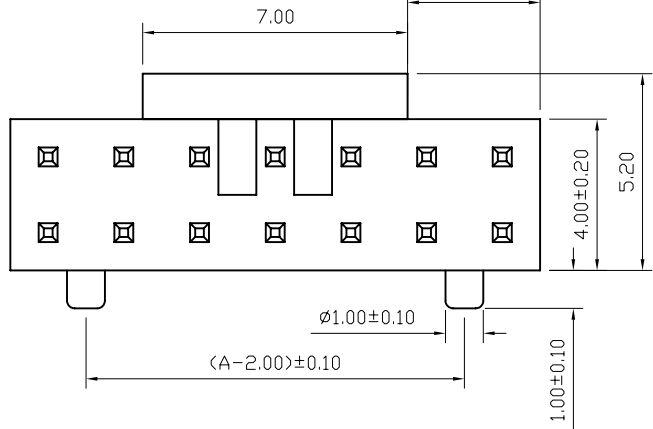

Recommended PCB Layout (PCB TOLERANCE ±0.05)

Rev.	ECN Number	Description	Drawn
4	CW10120013	更改版次	King.yan
5	CW11060005	糾正料號錯誤	King.yan

- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. DIMENSION SHALL BE INTERPRETED PER ANSI Y14.5M-1994.
 2. CURRENT RATING: 1 AMPERE.
 3. CONTACT RETENTION FORCE: 250g MIN, PER CONTACT.
 4. CONTACT RESISTANCE: 20 m ohms MAX. FOR INITIAL.
 5. DURABILITY: 50 CYCLES MIN.
 6. RATING VOLTAGE: 30V A/DC.
 7. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC rms. PER ONE MINUTE.
 8. INSULATION RESISTANCE: 5000 M ohms MIN..
 9. HARMFUL MATERIAL SHOULD BE COMPLIANT TO DOC. "EI-0005" STANDARDS.
 10. PRODUCT NUMBER MATRIX:

Diagram	Molding description
○	mass production & assemble mold
⊙	sample & assemble mold
⊕	mass production & fix mold
⊕	sample & fix mold

	GENERAL TOLERANCE		SCALE 1:1	ORIGINAL DRAWN King.yan	DATE 2011.06.09	DWG. NO.	TITLE	REV.
	XX. ±	XXX. ±	UNIT MM	CHECK Brake.jia	DATE 2011.06.09	PARTS NO.(INTENDED USE)	CUSTOMER DRAWING	5
	X. ± 0.35	.XXX ±						
	.X ± 0.25	X.* ± 4°	SIZE A4	APPROVE Brake.jia	DATE 2011.06.09	SXTZ-XXR4-X-X-S02-X	SHEET	1/1
.XX ± 0.20	.X.* ± 2°							