
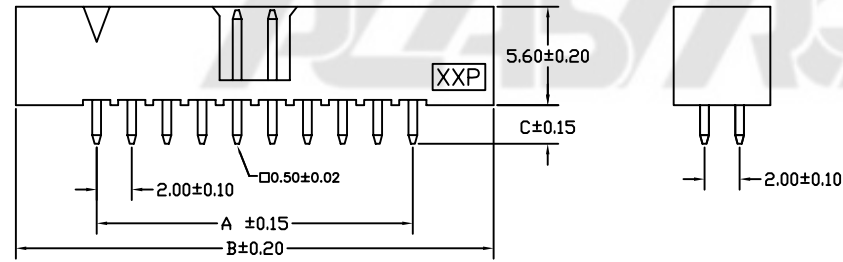


PARTS NO.	C
MBH-XXS-X-010	1.00
MBH-XXS-X-022	2.20
MBH-XXS-X-029	2.90
MBH-XXS-X-035	3.50
MBH-XXS-X-038	3.80

REV.	ECN NO.	DESCRIPTION	DRAWN
6	EW08020022	變更版本發行	liangtang 09/20'04
7	EW14120023	新增規格發行 (同時加鹽C±0.15尺寸管控)	XiaofengZhou 12/12'14

- NOTES: (UNLESS OTHERWISE SPECIFIED)
- CURRENT RATING: 1 AMPERE.
 - CONTACT RESISTANCE: 20 m ohms MAX. FOR INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC rms./MINUTE.
 - INSULATION RESISTANCE: 5000 M ohms MIN..
 - DIM. MARKED ① ② ③SHOULD BE CONTROLLED BY QC
 - HARMFUL MATERIAL SHOULD BE COMPLIANT TO DOC. "EI-0005" STANDARDS.
 - PRODUCT NUMBER MATRIX:

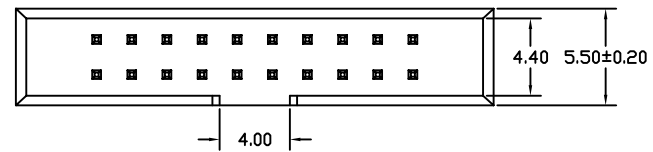

MBH-XXS-X-C


Number of Contacts: Straight

Contact Plating

Definition	Code
⊙ Tin plated:	A
⊙ Gold plated:	
flash B 15μ"	F
10μ" E 30μ"	J
⊙ Duplex plating:	
flash K 15μ"	P
10μ" N 30μ"	U
⊙ Standard:	B

No. of Contacts	DIMENSIONS	
	A	B
6	4.00	13.20
8	6.00	15.20
10	8.00	17.20
12	10.00	19.20
14	12.00	21.20
16	14.00	23.20
18	16.00	25.20
20	18.00	27.20
22	20.00	29.20
24	22.00	31.20
26	24.00	33.20
30	28.00	37.20
32	30.00	39.20
34	32.00	41.20
36	34.00	43.20
40	38.00	47.20
44	42.00	51.20
50	48.00	57.20
56	54.00	63.20
60	60.00	67.20
68	68.00	75.20

標準規格



 PLASTREN TECHNOLOGY (SHEN ZHEN) CO., LTD.	GENERAL TOLERANCE		SCALE 1:1	ORIGINAL DRAWN XiaofengZhou	DATE 2014.12.12	DWG. NO. 600-0000-0432	TITLE CUSTOMER DRAWING	REV. 7
	X. ± 0.30		UNIT MM	CHECK Gavin Gao	DATE 2014.12.12			PARTS NO.(INTENDED USE) MBH-XXS-X-C
	.X ± 0.25	X.* ± 3°	SIZE A4	APPROVE Gavin Gao	DATE 2014.12.12			
	.XX ± 0.15	.X* ± 2°						