


No. of Contacts	Dimensions	
	A	B
10	5.08	6.35
12	6.35	7.62
14	7.62	8.89
16	8.89	10.16
18	10.16	11.43
20	11.43	12.70
22	12.70	13.97
24	13.97	15.24
26	15.24	16.51
28	16.51	17.78
30	17.78	19.05
32	19.05	20.32
34	20.32	21.59
36	21.59	22.86
38	22.86	24.13
40	24.13	25.40
42	25.40	26.67
44	26.67	27.94
46	27.94	29.21
48	29.21	30.48
50	30.48	31.75
52	31.75	33.02
54	33.02	34.29
56	34.29	35.56
58	35.56	36.83
60	36.83	38.10
62	38.10	39.37
64	39.37	40.64
66	40.64	41.91
68	41.91	43.18
70	43.18	44.45
72	44.45	45.72
74	45.72	46.99
76	46.99	48.26
78	48.26	49.53
80	49.53	50.80
82	50.80	52.07
84	52.07	53.34
86	53.34	54.61
88	54.61	55.88
90	55.88	57.15
92	57.15	58.42
94	58.42	59.69
96	59.69	60.96
98	60.96	62.23
100	62.23	63.50

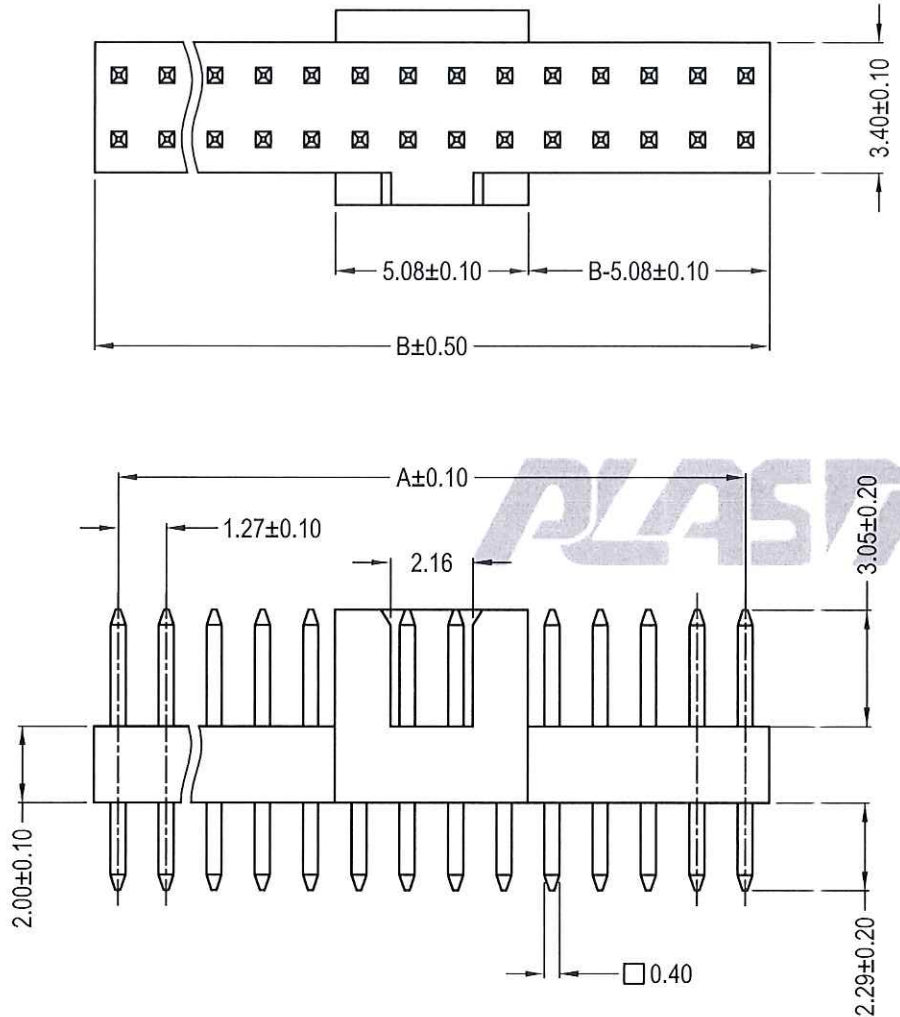

版次	ECN 编码	描述		设计/日期
1	EH17120044	初版发行		陈秀清_2017/12/06
		改前	改后	

- NOTES: (Unless otherwise specified)
- Dimension shall be interpreted per ANSI Y14.5M.
  - Materials:  
Insulator material: High Temperature Thermoplastic, UL 94V-0; Color: Black.  
Contact Material: Copper alloy.
  - Current Rating: 1A .
  - Voltage Rating: 30V AC/DC.
  - Working Temperature: -40°C ~ +105°C.
  - Harmful material should be compliant to doc. "EI-0005" standards.
  - Product number matrix:

XNZ - XXS3 - X - S01


Pin type	L	B	P
Brass			
Bronze			
Phosphor Bronze			
Standard: L			

Number of contacts

Straight

Contact Plating:

Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B 15 u"	F
10 u" E 30 u"	J
◎ Duplex plated:	
flash K 15 u"	P
10 u" N 30 u"	U

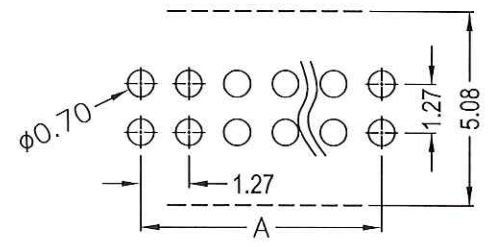

TOLERANCE TABLE	
X. ± 0.30	X.° ± 3°
.X ± 0.25	.X.° ± 2°
.XX ± 0.20	

SCALE	5:1
UNIT	mm
SIZE	A4

DRAWN	陈秀清
CHECK	朱宇静
APPROVE	陈文超

DATE	2017/12/06
DATE	2017/12/12
DATE	2018/12/13

DWG. NO.	600-0000-1803
PARTS NO.(INTENDED USE)	XNZ-XXS3-X-S01

TITLE	CUSTOMER DRAWING
-------	------------------

REV.	1
SHEET	1/1