
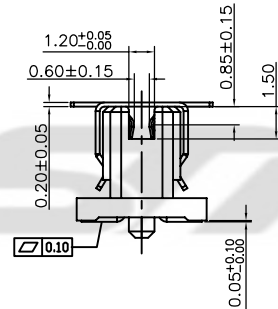
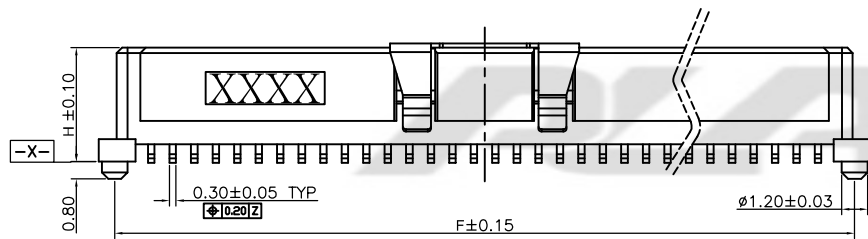


REV.	ECN NUMBER	DESCRIPTION	DRAWN DATE
7	EH15120276	UPDATE DRAWING	ShiLu Yin-2015/12/23
8	EH17050043	CHANGE SIZE SPECIFICATION	GuoXuan Mo_2017/05/06
9	EH17050113	UPDATE DRAWING	Elin Li_2017/05/16



- NOTES: (UNLESS OTHERWISE SPECIFIED)
- DIMENSION SHALL BE INTERPRETED PER ANSI Y14.5M-1994
 - MATERIAL:
HOUSING MATERIAL: High Temperature Thermoplastic, UL 94V-0.
CONTACT MATERIAL: PHOSPHOR BRONZE, T=0.20mm
VACUUM COVER MATERIAL: STAINLESS STEEL, T=0.25mm
 - Current rating: 1 A.
 - Voltage rating: 100V AC/DC
 - WORKING TEMPERATURE: -55°C To +85°C
 - HARMFUL MATERIAL SHOULD BE COMPLIANT TO DOC. "EI-0005" STANDARDS.
 - PRODUCT NUMBER MATRIX:

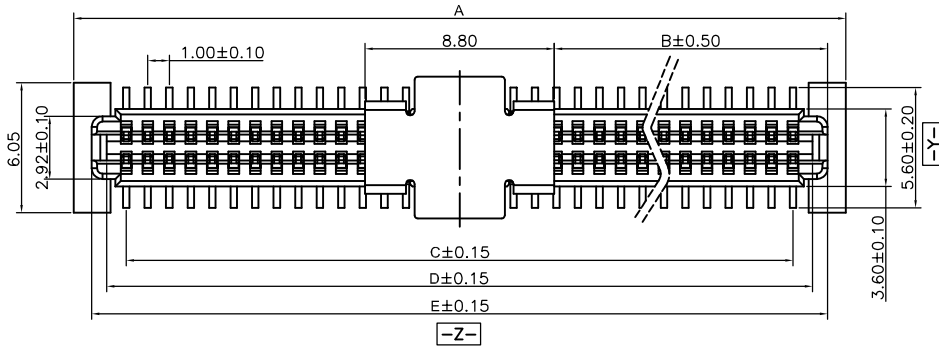

RG10X-XXX-*
 NULL: BLACK
 D: IVORY
 PLATING CODE (lead free)
 B: gold flash over all
 1: Plating gold flash on contact area, Matte Sn 100 μ" on solder area
 2: Plating Au 3 μ" on contact area, Matte Sn 100 μ" on solder area
 3: Plating Au 5 μ" on contact area, Matte Sn 100 μ" on solder area
 4: Plating Au 10 μ" on contact area, Matte Sn 100 μ" on solder area
 5: Plating Au 15 μ" on contact area, Matte Sn 100 μ" on solder area
 6: Plating Au 20 μ" on contact area, Matte Sn 100 μ" on solder area
 7: Plating Au 50 μ" on contact area, Matte Sn 100 μ" on solder area
 8: Plating Au 30 μ" on contact area, Matte Sn 100 μ" on solder area

STACKING HEIGHT
 1: H=7.30MM
 2: H=10.30MM
 3: H=5.30MM


NO. OF POS.
 (1~99)
 24=24POS.
 30=30POS.
 64=64POS.
 84=84POS.

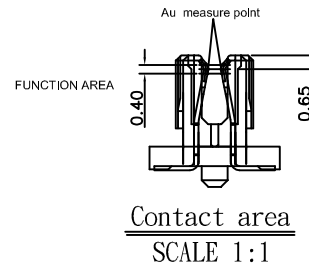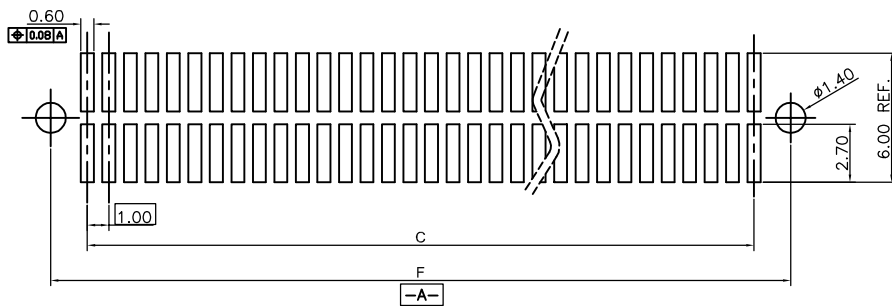



RECOMMENDED PCB LAYOUT
 TOLERANCE ±0.05

CKT	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
24	15.90	2.71	11.00	12.82	14.22	14.40
30	18.90	4.21	14.00	15.82	17.22	17.40
64	35.90	12.71	31.00	32.82	34.22	34.40
84	45.90	17.71	41.00	42.82	44.22	44.40

 PLASTRON TECHNOLOGY (SHEN ZHEN) CO., LTD.	GENERAL TOLERANCE		SCALE: 1:1	DRAWN: Elin Li	DATE: 2017/05/16	DWG. NO: 600-0000-0312	TITLE: CUSTOMER_DRAWING	REV: 9
	X. ± 0.30	X.* ± 3'	UNIT: mm	CHECK: Gavin Gao	DATE: 2017/05/16			PARTS. NO: RG10X-XXX-*_SERIES
	.X ± 0.20	.X* ± 2'	SIZE: A4	APPROVE: NingJing Zhu	DATE: 2017/05/16			
	.XX ± 0.10	.XX* ± 1'						
.XXX ± 0.05	.XXX* ±							

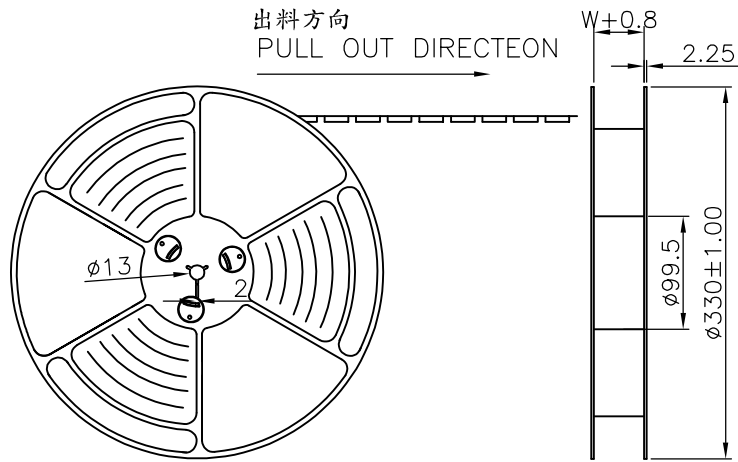

標籤黏貼處 (朝捲裝包材的小定位孔一側)
 Location of label sticking (label at small positioning hole of the carrier tape side).

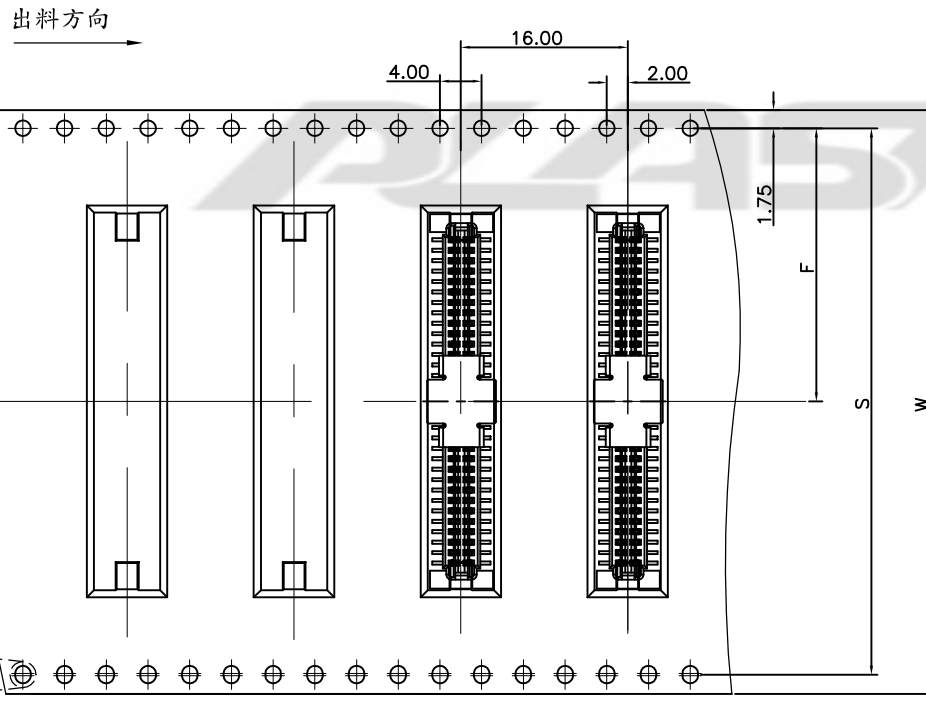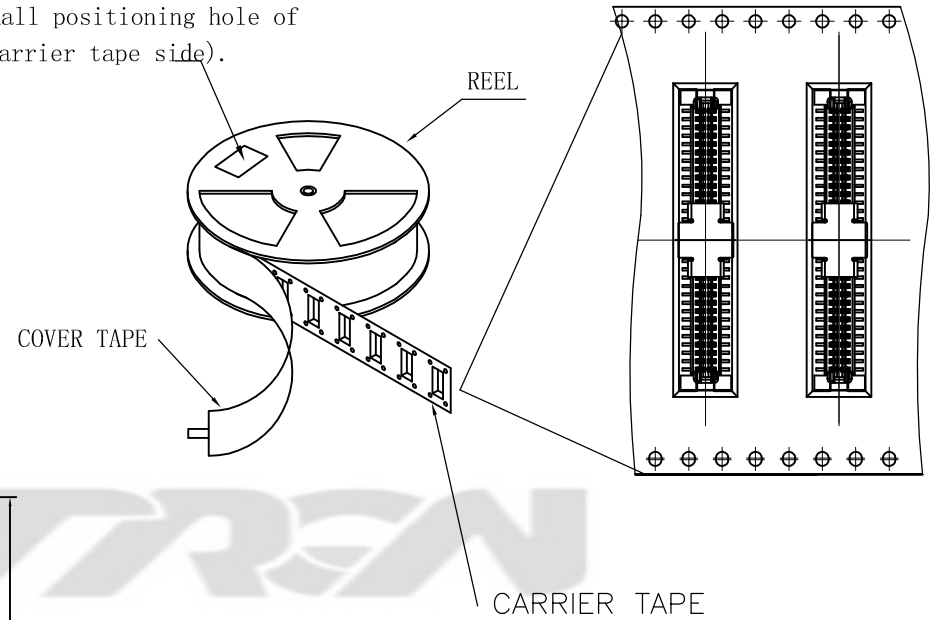

SERIES	P/N	W	S	F	PCS/REEL	REELS/CARTON	PCS/CARTON
RG103	84	72.0	68.4	34.2	600	2	1200
	64	56.0	52.4	26.2	600	3	1800
RG102	84	72.0	68.4	34.2	300	2	600
	64	56.0	52.4	26.2	300	3	900
RG101	84	72.0	68.4	34.2	400	2	800
	64	56.0	52.4	26.2	400	3	1200
	30	32.0	28.4	14.20	400	5	2000
	24	32.0	28.4	14.20	400	5	2000



GENERAL TOLERANCE	
X. ± 0.30	X.* ± 3°
.X ± 0.20	.X* ± 2°
.XX ± 0.10	.XX* ± 1°
.XXX ± 0.05	.XXX* ±

SCALE:	1:1
UNIT:	mm
SIZE:	A4


DRAWN:	Elin Li
CHECK:	Gavin Gao
APPROVE:	NingJing Zhu

DATE:	2017/05/16
DATE:	2017/05/16
DATE:	2017/05/16

DWG. NO:	600-0000-0312
PARTS. NO:	RG10X-XXX-*_SERIES


TITLE:	CUSTOMER_DRAWING
--------	------------------

REV:	9
SHEET:	2/3

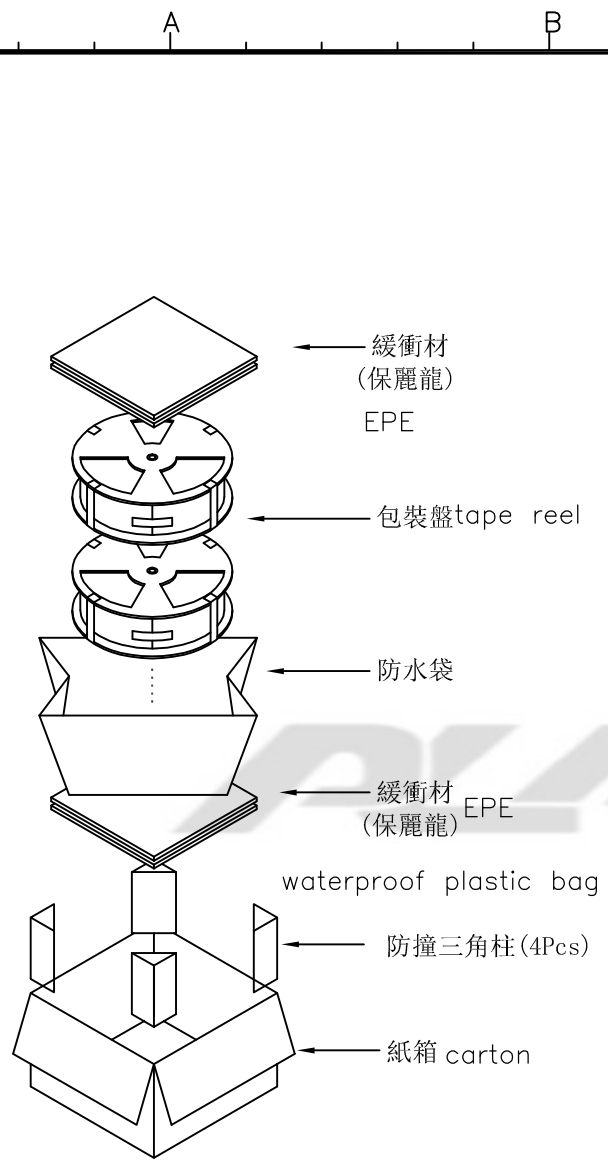


NOTE:

- 每捲包裝數量及每箱裝箱數量如相上表格。
Packing q'ty of each reel & carton as up table shown
- 以上膠帶覆蓋下包裝帶自粘包裝
Use cover tape with adhesive to cover self acting
- 每個紙箱放2個珍珠棉
Every carton use 2pcs EPE.
- 將裝滿產品的卷盤放入紙箱并以膠帶封口
Put reels in the carton and use adhesive tape to seal up.
- 帶子引導長度
LEAD TAPE LENGH

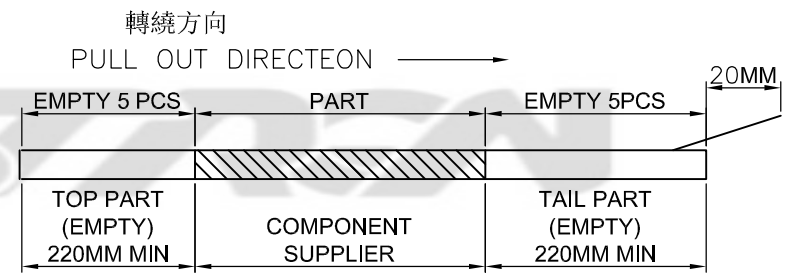

- 上帶剝力力為: 0.1~1.3 N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出貨'運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

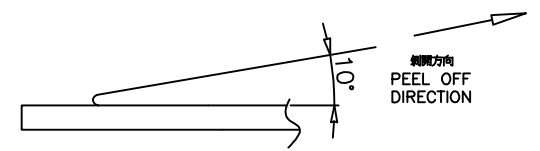

GENERAL TOLERANCE	
X. ± 0.30	X.* ± 3°
.X ± 0.20	.X* ± 2°
.XX ± 0.10	.XX* ± 1°
.XXX ± 0.05	.XXX* ±

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN:	Elin Li
CHECK:	Gavin Gao
APPROVE:	NingJing Zhu

DATE:	2017/05/16
DATE:	2017/05/16
DATE:	2017/05/16

DWG. NO:	600-0000-0312
PARTS. NO:	RG10X-XXX-*_SERIES

TITLE:	CUSTOMER_DRAWING
--------	------------------

REV:	9
SHEET:	3/3